

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER
THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

[WIPO]

[Bar Code]


(43) International Publication Date
March 11, 2004 (03/11/2004)

PCT

(10) International Publication Number
WO 2004/020130 A1

- (51) International Patent Classification⁷: **B23B 31/20**, 29/02
- (72) Inventor; and
(75) Inventor/Applicant (*US only*): **OETTLE, Matthias** [DE/DE]; Entenbachstrasse 9/4, 72585 Riederich (DE).
- (21) International Application No.: PCT/EP2003/006320
- (74) Representative: **BARTELS AND PARTNER**; Lange Strasse 51, 70174 Stuttgart (DE).
- (22) International Filing Date:
June 16, 2003 (06/16/2003)
- (81) Designated States (*national*): JP, US.
- (25) Language in which the international application was originally filed: German
- (84) Designated States (*regional*): European Patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).
- (26) Language in which the international application is published: German
- (30) Priority Data:
102 39 422.9 August 28, 2002 (08/28/2002) DE
- Published:**
— *With International Search Report.*
- (71) Applicant (*for all designated states except the US*): **HARTMETALL-WERKZEUGFABRIK PAUL HORN GMBH** [DE/DE]; Unter dem Holz 33-35, 72072 Tübingen (DE).
- Reference is made for an explanation of the two-letter codes and the other abbreviations to the Guidance Notes on Codes and Abbreviations in the front section of each regular PCT Gazette edition.*

(54) Title: CUTTING MACHINING TOOL

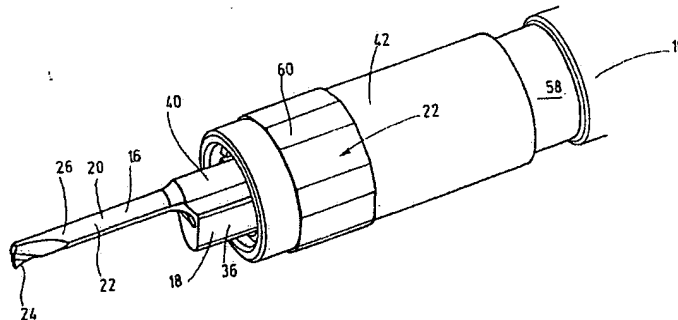

(57) **Abstract:** The invention relates to a cutting machining tool, especially of a boring bar type, comprising a holding device (10), one end of which is provided with a fixing shaft while the other end thereof is provided with a seat (12) for a removable cutting member (16). Said cutting member encompasses a support part (18) which engages at least partly into the seat (12) in the fixed state and a machining part (20). The support part (18) can be fixed in a clamping manner in the seat (12) by means of a fastening part (22). The seat (12) is provided with a rest area (28). The cutting member can be securely fixed in the seat across a larger fixing range by means of a support part due to the fact that the seat (12) comprises a delivery area (30) in addition to the rest area (28), said two areas (28, 30) being movable towards or away from each other so as to fasten or remove the cutting member (16) by means of the fastening part (22), and secure fixing and support is achieved by means of three planar areas that are located on the outer circumference of the support part.

[Continued on next page]